



BETONSTAR®

CONCRETE PUMPS

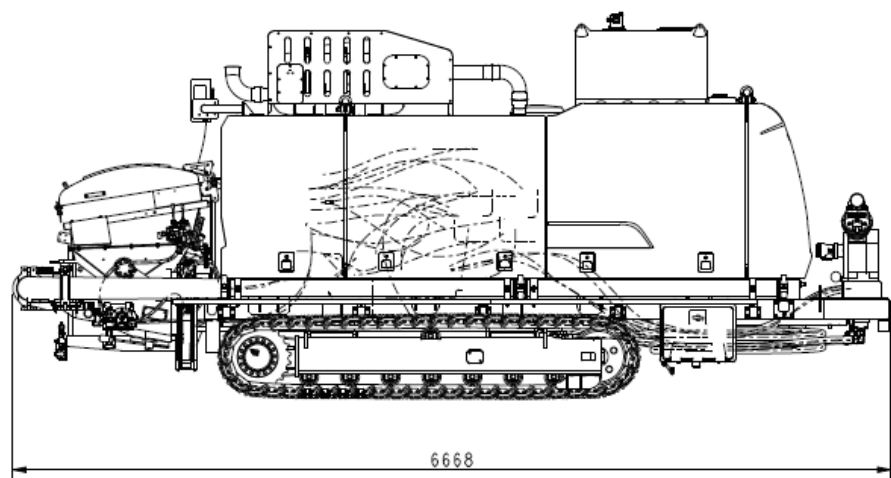

AFMETINGEN - DIMENSIONS

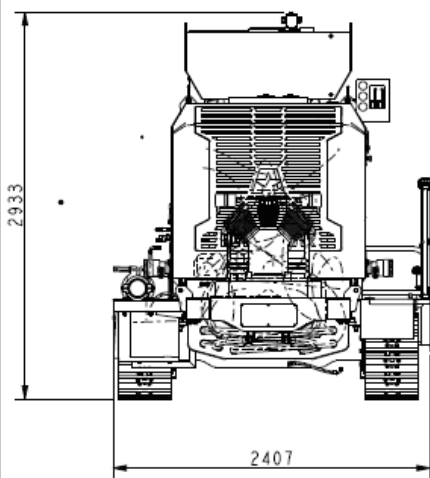

BSC 21.90D

**SPECIFICATIES / SPÉCIFICATIONS**

Motor / Moteur: Volvo Penta TAD881VE

Max debiet / Débit maximale: 129 m³/h

Max druk / Pression maximale: 92 bar

Slaglengte / Longueur de course: 2100 mm

Diameter aanzuigcilinder / Dia. pison: 200 mm

Inhoud hopper / Capacité tremie: 650 L

Hoofd hydr. pomp / Pompe hydr. principale: 2 X Rexroth VG125

S-Valve: Rexroth A 10 VO 28

Service systeem hydr. pomp / Système service pompe hydr: ASC

Diameter uitgang / Diametre sorti: 150 mm (5.5" vitaulik)

Rupsonderstel / Chenils: Staal / Acier

Max. snelheid / vitesse max: 2 km/h

Capaciteit watertank / Capacité réservoir d'eau: 550 L

Waterpomp / Pompe a eau: 18 L/min

Hogedrukreiniger / Nettoyeur haute pression: 145 bar

Lucht compressor / Compresseur d'air: 555 L/min - 15 bar

Afstandsbediening / Radiocommande: 2 X Hetric

